

IVC MZ-3634-01

Outdoor Megapixel Manual Zoom Color IP-Camera



- *2 Megapixel resolution*
- *Day/Night switching for almost any lighting condition*
- *H.264, MPEG4, MJPEG*
- *PoE IEEE 802.3af compliant*
- *Stainless Steel Enclosure rated IP-68*

The MZ-3634-01 is a high-quality, high-resolution color video camera with a vari-focal lens and auto-iris. The lens provided is adjustable from 3 to 8 mm, to provide a horizontal field-of-view of over 90 degrees. Other lens options are available. The MZ-3634-01 supports multiple codecs and is able to deliver H.264, MPEG4, and MJPEG video.

The camera can accept one contact closure or TTL input from an auxiliary security or process-monitoring device to initiate automatic views and video recordings of intrusions or process malfunctions.

The camera is housed in a heavy duty, all weather, stainless steel, IP-68 rated enclosure ready for mounting and requires only a powered Ethernet network connection.

Visit
www.ivcco.com/demonstrations/index.html
for a live video demonstration




MZ-3634-01 Specifications

Imager	1/3.2" CMOS
AES	1/5 ~ 1/40,000 sec
Exposure	Auto
Min. Illum.	0.1 lux
White Balance	Auto
Iris	Auto
Focus	Manual
View Angle	35.2° - 90.7°
Focal Length	3 - 8 mm
F-number	1.2
Resolution	1600x1200

Compression	M-JPEG; MPEG4; H.264
Ethernet	100Base-TX/10BaseT (RJ-45)
I/O Terminals	1 Input, 1 Output
Alarms	In-video; tamper
Frame Rate	30 FPS (1280x720) 15 FPS (1600x1200)
Power Req.	12 VDC, 24 VAC, 110-240 VAC, PoE
Power Cons.	28 W max
Weight	24 lbs
Dimensions	6.1" W x 4.57"H
Operating Temp.	-29° - 50° C


IVC Camera System Software

At the heart of our camera system is our **Relay Server Software**. This scalable, enterprise application provides a full range of camera management and viewing features for up to 24 IP-cameras. Camera video can be accessed over a LAN, WAN, VPN, or the Internet from virtually anywhere, and can be connected by fiber, copper, satellite, or encrypted wireless radio. Live and stored video can be viewed and controlled from anywhere on-site or off-site by authorized users from any networked PC.

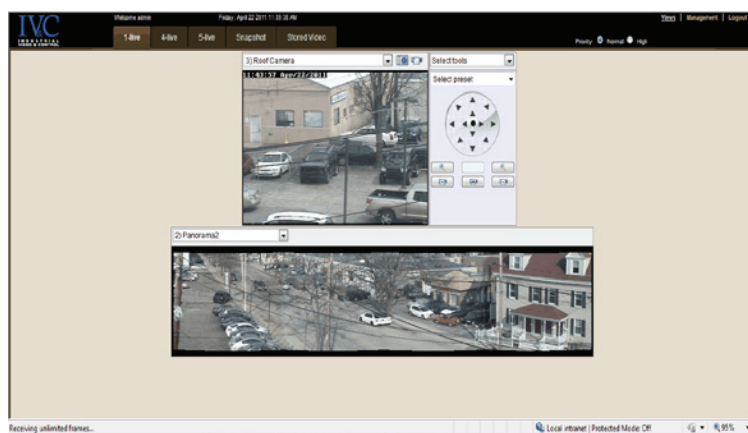

Point & click camera access and control

Fully configurable multi-up displays

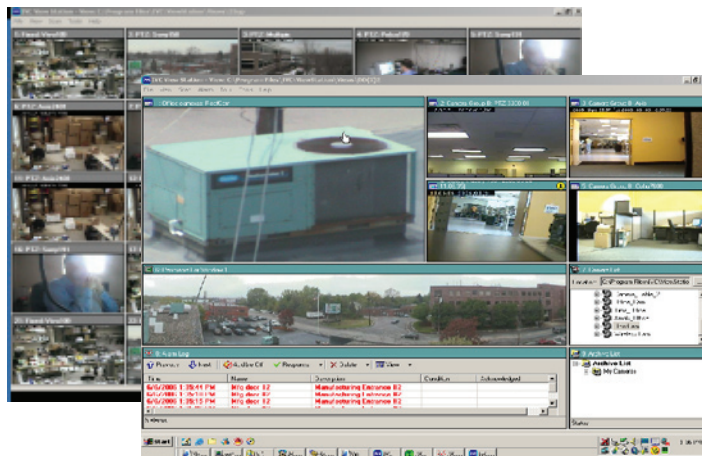

IVC's **View Station Software** provides comprehensive multi-camera management and viewing. The View Station console is completely configurable. Users can view video from up to 25 cameras on a single or multiple monitors. Tours of selected preset views from any number of cameras can be defined on one or more schedules. The View Station provides sophisticated, yet easy to use alarm management. At the occurrence of a user-defined alarm, any camera control, discreet URL command, or executable program can be invoked.



330 Nevada Street
Newton, MA 02460
ph: 617-467-3059
fax: 617-687-0751
email: sales@ivcco.com